



# ProCore® SR Series

DEEP-TINE AERATORS

## FEATURES

Deep-tine aerification relieves soil compaction at lower soil levels than typical aerification. The tines fracture the soil creating channels through the root zone allowing oxygen, water and critical nutrients to penetrate deep into the soil profile.

- Multiple high-performance units for a wide variety of aeration applications
- Aeration widths of 48"-75"
- Aeration depths to 16"
- Hydraulic depth control makes setting aeration depth easy
- Solid and coring tines available for your specific aeration application


## Reduce soil compaction for healthier turf.

ProCore SR Series deep-tine aerators alleviate subsurface soil compaction, helping to create an environment for turf to thrive. These durable and time-tested products are capable of withstanding the most extreme aeration conditions. From lightweight, precision machines to robust, heavy-duty machines to break up soil on even the most compact surfaces, the ProCore SR Series deep-tine aerators are the ultimate choice for performance and quality.

[toro.com/cultivation](http://toro.com/cultivation)



## The deep-tine difference.

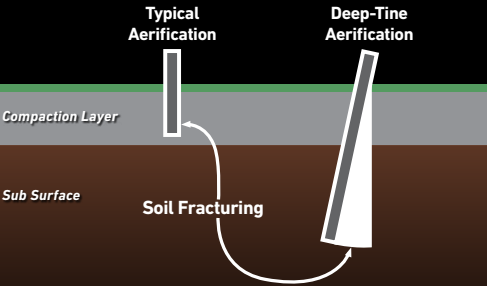

# ProCore® SR Series Specifications\*

	PROCORE SR48 MODEL 09930	PROCORE SR54 MODEL 09931	PROCORE SR54-S MODEL 09932	PROCORE SR70 MODEL 09933	PROCORE SR70-S MODEL 09934	PROCORE SR72 MODEL 09935	PROCORE SR75 MODEL 09936
<b>WEIGHT WITH PTO &amp; TOP LINK</b>	1,530 lbs. (694 kg)	1,165 lbs. (528 kg)	1,250 lbs. (567 kg)	1,500 lbs. (681 kg)	1,655 lbs. (750 kg)	2,091 lbs. (945 kg)	3,250 lbs. (1,475 kg)
<b>WORKING WIDTH</b>	48" (1.22 m)	54" (1.37 m)	54" (1.37 m)	73" (1.85 m)	73" (1.85 m)	72" (1.83 m)	78" (1.98 m)
<b>WORKING DEPTH (ADJUSTABLE)</b>	1" - 14" (25-356 mm)	1" - 10" (25-250 mm)	1" - 10" (25-250 mm)	1" - 10" (25-250 mm)	1" - 10" (25-250 mm)	1" - 16" (25-406 mm)	1" - 16" (25-406 mm)
<b>HOLE SPACING</b>	3" - 6" (75-150 mm)	2.5" - 4" (64-102 mm)	2.5" - 4" (64-102 mm)	2.5" - 4" (64-102 mm)	2.5" - 4" (64-102 mm)	3" - 6" (75-150 mm)	3" - 6" (75-150 mm)
<b>PRODUCTIVITY</b>	25,000 sq.ft./hr. (2,325 sq. m/hr.)	36,000 sq.ft./hr. (3,345 sq. m/hr.)	36,000 sq.ft./hr. (3,345 sq. m/hr.)	48,000 sq.ft./hr. (4,460 sq. m/hr.)	48,000 sq.ft./hr. (4,460 sq. m/hr.)	38,000 sq.ft./hr. (3,530 sq. m/hr.)	48,000 sq.ft./hr. (4,460 sq. m/hr.)
<b>RECOMMENDED TRACTOR SIZE</b>	25 HP	16-18 HP	18 HP	25-35 HP	25-35 HP	45 HP	55+ HP
<b>RECOMMENDED LIFT CAPACITY</b>	1,800 lbs. (817 kg)	1,200 lbs. (682 kg)	1,500 lbs. (682 kg)	1,700 lbs. (773 kg)	1,800 lbs. (817 kg)	2,800 lbs. (1,270 kg)	4,000 lbs. (1,815 kg)
<b>RECOMMENDED COUNTER WEIGHT</b>	300 lbs. (135 kg)	150 lbs. (70 kg)	150 lbs. (70 kg)	250 lbs. (115 kg)	250 lbs. (115 kg)	300-500 lbs. (135-225 kg)	700-900 lbs. (315-410 kg)
<b>RECOMMENDED PTO SPEED</b>	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm
<b>ACTUAL WORKING SPEED @ 400 PTO RPM (VARIES WITH HOLE SPACING)</b>	.8 -1.3 mph (1.29 - 2.09 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	0.8 -1.5 mph (1.29 - 2.41 kph)	0.8 -1.5 mph (1.29 - 2.41 kph)
<b>LIFT SYSTEM</b>	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point
<b>CERTIFICATION</b>	ISO 4254-5:2008 CE and EU machinery directives						
<b>WARRANTY</b>	Two-year or 500-hour limited warranty. Refer to Operator's Manual for further details						

PROCORE SR SERIES ACCESSORIES	
REAR ROLLER OPTIONS	
<b>09952</b>	Rear Roller Kit for ProCore SR54 / SR54S
<b>09953</b>	Rear Roller Kit for ProCore SR70 / SR70S
<b>09954</b>	Rear Roller Kit for ProCore SR72
<b>09956</b>	Rear Roller Kit for ProCore SR75

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. Consult your local Toro Distributor.

